


## 280-5010

## Stainless Steel Fittings For Convolute Metal Conduits

G (PF)

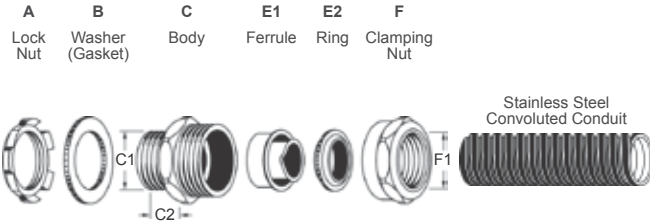

- Thread Type : G ( PF ).
- Material Data : Stainless Steel for A.C.F parts, Polypropylene for B.E2 parts, Galvanized metal for E1 part.
- Application : Stainless Steel Conduit Fittings provide chemical-resistance and high-impact functions, which are connected to the stainless steel convolute conduits to protect cables in the applications of many industries.


\* The Washer ( Gasket ) and Lock Nut are all included in a single pack, this saves additional ordering work and storage locations.

Thread	Cat. No.	Max. Joint F1 mm	Accommodated		Thread O. D. C1 mm	Panel Mounting Hole mm	Thread Length C2 mm	Std. Pkg. pcs	
			AVC Conduits						
G ( P F )	1/2	S - FSS21 - 21	21.8	(S - SJ04B)	1/2 "	20.2	21 ~ 21.2	12.4	10
	3/4	S - FSS26 - 26	26.7	(S - SJ06B)	3/4 "	25.7	26.5 ~ 26.8	13.6	10
	1	S - FSS33 - 34	34.7	(S - SJ08B)	1 "	32.3	33.3 ~ 33.6	14.3	10
	1 1/4	S - FSS42 - 42	43.6	(S - SJ10B)	1 1/4 "	40.9	42 ~ 42.3	17	5
	1 1/2	S - FSS48 - 48	50.6	(S - SJ12B)	1 1/2 "	46.8	48 ~ 48.4	18.3	5
	2	S - FSS60 - 60	60.7	(S - SJ16B)	2 "	58.7	60 ~ 60.4	20.1	5

## 280-5020

## Female Thread Stainless Steel Fittings For Convolute Metal Conduits

G (PF)

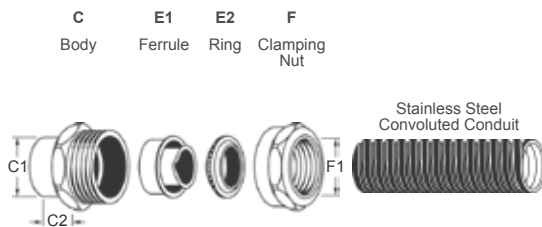

- Thread Type : G ( PF ), female type.
- Material Data : Stainless Steel for A.C.F parts, Polypropylene for B.E2 parts, Galvanized metal for E1 part.
- Application : Stainless Steel Conduit Fittings provide chemical-resistance and high-impact functions, which are connected to the stainless steel convolute conduits to protect cables in the applications of many industries.

Thread	Cat. No.	Max. Joint F1 mm	Accommodated		Thread I. D. C1 mm	Thread Length C2 mm	Std. Pkg. pcs	
			AVC Conduits					
G ( P F )	1/2	S - ISS21 - 21	21.8	(S - SJ04B)	1/2 "	19.5	12.2	10
	3/4	S - ISS26 - 26	26.7	(S - SJ06B)	3/4 "	25.4	13.7	10
	1	S - ISS33 - 34	34.7	(S - SJ08B)	1 "	31.7	13.9	10
	1 1/4	S - ISS42 - 42	43.6	(S - SJ10B)	1 1/4 "	40.2	18	5
	1 1/2	S - ISS48 - 48	50.6	(S - SJ12B)	1 1/2 "	45.8	18.5	5
	2	S - ISS60 - 60	60.7	(S - SJ16B)	2 "	57.5	18.7	5